
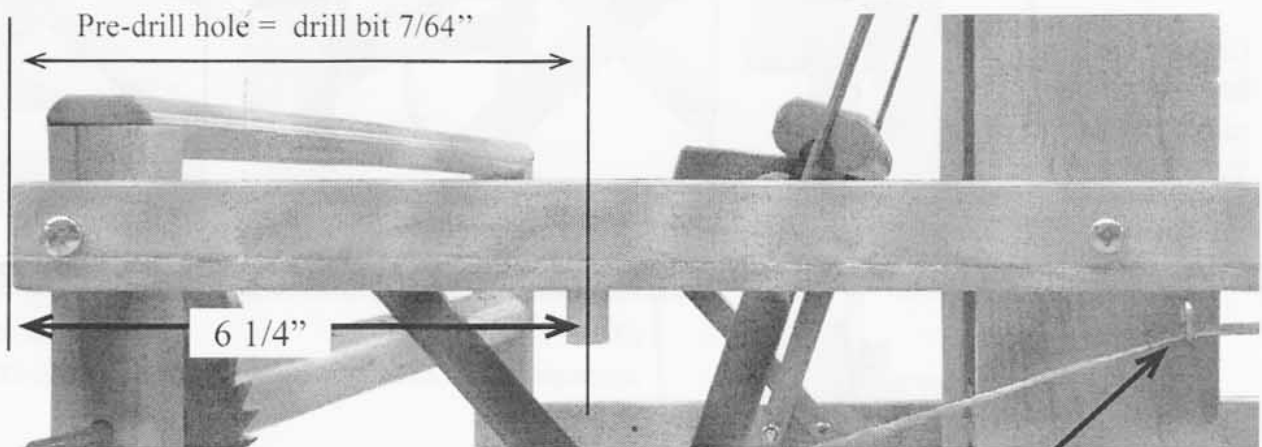


KIT Friction Brake Dorothy 15³/₄"


With the Brake Drum: 8000-0016

Without the Brake Drum: 8000-0017

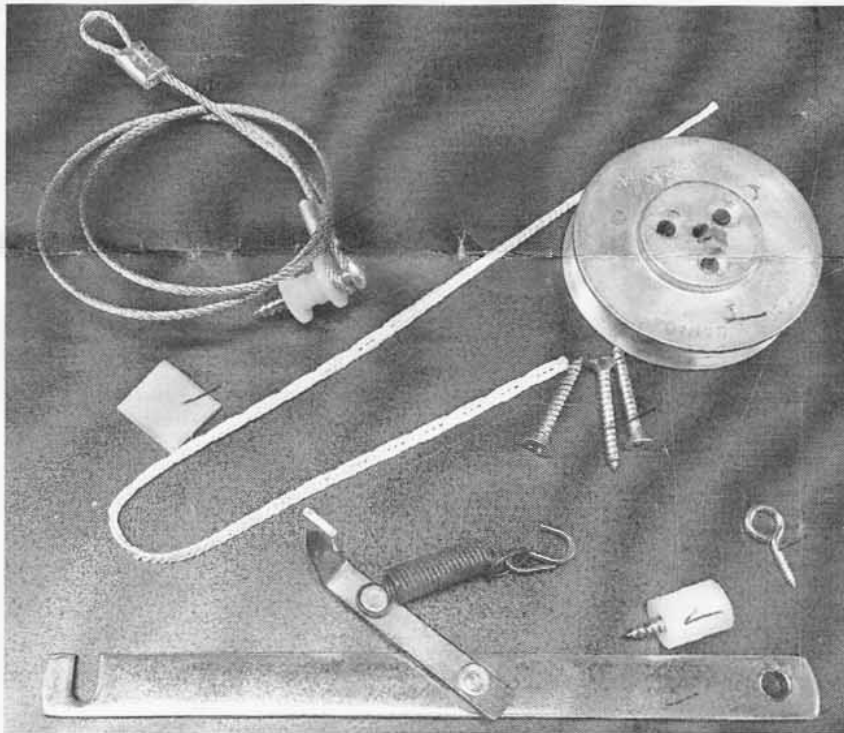

Install the front lever stopper and the eyebolt as in the picture.

Eyebolt

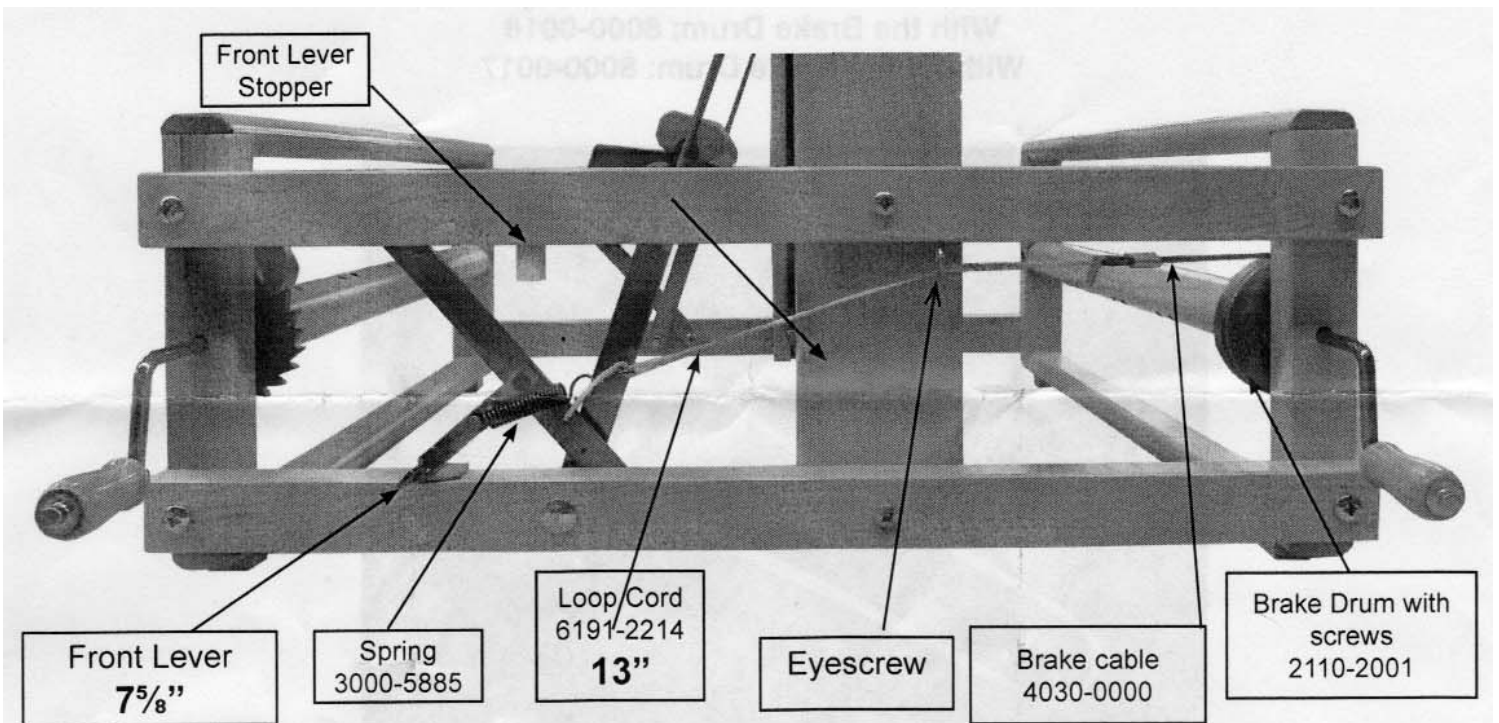

The length of the loop cord has been marked (black mark) and tested before shipping. After some time, the loop cord may stretch. You will then have to readjust the tension by changing the loop on the cord. When the front lever is release (to the front lever stopper), the brake circle (around the brake drum) should be loose enough to be able to turn the back beam.

To advance the cloth, pivot the front lever to the back of the loom in order to release the tension on the brake circle. When sufficiently advanced, pivot the lever back to the front to re-establish the tension on the brake. Tighten the warp with the warp beam crank.

